



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) Publication number : **0 651 553 A1**

(12)

EUROPEAN PATENT APPLICATION

(21) Application number : **94307949.1**

(51) Int. Cl.⁶ : **H04N 1/21, G06K 7/10**

(22) Date of filing : **28.10.94**

(30) Priority : **29.10.93 JP 272116/93**

(43) Date of publication of application :
03.05.95 Bulletin 95/18

(84) Designated Contracting States :
DE ES FR GB IT NL

(71) Applicant : **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shimomaruko,
Ohta-ku
Tokyo (JP)

(72) Inventor : **Sakaegi, Yuji, c/o CANON K.K.**
30-2, 3-Chome,
Shimomaruko
Ohta-ku, Tokyo (JP)


(74) Representative : **Beresford, Keith Denis Lewis**
et al
BERESFORD & Co.
2-5 Warwick Court
High Holborn
London WC1R 5DJ (GB)

(54) **Electronic camera.**

(57) An electronic camera for providing a device for rapidly inputting various useful attributes of an image comprises an image signal processing circuit for selectively processing an image signal in one of a plurality of image pick-up and signal processing modes, and a circuit for recording a processed image signal in a main file area or an attribute file area whereby the attribute of the image file can be readily recorded according to a selective process by the image signal processing circuit.

It further comprises a circuit for transferring data or program from an image pick-up unit to a RAM or between a recording medium and the RAM, a circuit for storing whether a program for controlling and processing the mode is a built-in program or an external program. In the image pick-up in the mode with the external program being designated, the program is transferred from the recording medium to the RAM and then the control is shifted to the program so that various processing as the attribute (or the image) can be made.

FIG. 2

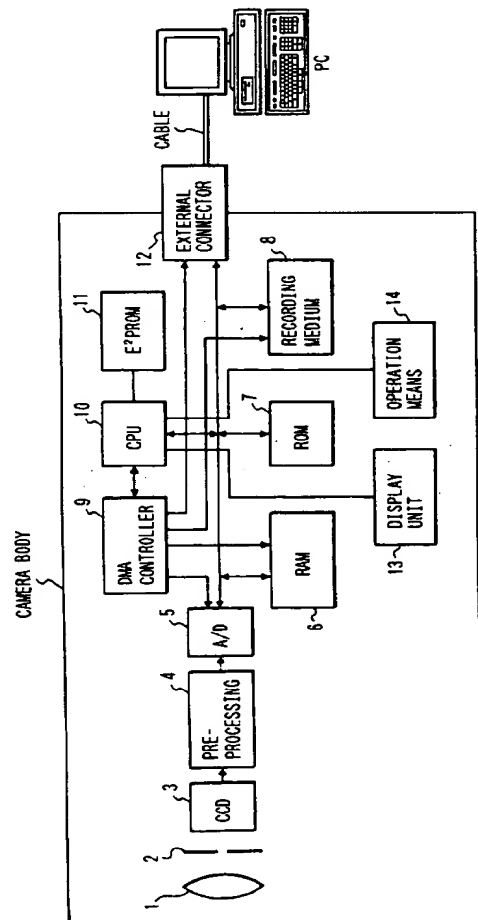

EP 0 651 553 A1

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an electronic camera.

Related Background Art

A prior art electronic camera for digital recording is constructed as shown in Fig. 1.

In Fig. 1, an image through an optical lens 1 is picked up by an image pick-up device and processed for CDS or AGC by a circuit 3 and amplified to a predetermined level by a pre-amplifier circuit 4. Then, it is passed through an A/D conversion circuit 5 and a processing circuit 5' and is temporarily stored in a memory 6. It is compressed by a compression circuit 7 before it is recorded on a medium 8. Numeral 9 denotes a memory controller and numeral 10 denotes a system controller.

The electronic camera of this construction is sufficient to "photograph" an image but has a limitation as an apparatus for acquiring further information. Namely, since it does not accompany information as to detailed information of the "photograph", memory or memorandum of a photographer is required when the "photograph" is to be subsequently processed or edited, which significantly reduces the efficiency.

In such a prior art electronic camera, a content of process by the system controller is fixed on a ROM as firmware, and a purpose recording of the camera is predetermined when it is manufactured in a plant and it cannot meet various sorts of requirements.

SUMMARY OF THE INVENTION

It is a concern of the present invention to alleviate the problems encountered in the prior art electronic camera.

An embodiment of the present invention to allow information other than "photograph" to be accompanied in an image file and the generation of various sorts of information without fixing a generation method of the information on firmware.

An embodiment of the present invention comprises a main file area such as an image file and an attribute file area provided in a file area for recording an image. It further comprises means for selecting and storing a processing program for generating information for recording in the respective areas as a built-in program or an external program, and means for transferring the program data from the recording medium when the stored content of the storage means indicates the external program and transferring the shift to the program.

Thus, the information describing the image such as merchandise management information represent-

ed by a bar code or title and names derived by character recognition can be easily linked to a target image so that the apparatus is very useful as an input device for later retrieving or information-managing the image.

Other concerns and features of the present invention will be apparent from the following description of the invention and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a configuration of a prior art electronic camera.

Fig. 2 shows a block diagram of an embodiment of the present invention,

Fig. 3 shows a flow chart of a setting program on a PC,

Fig. 4 shows a flow chart continued from Fig. 3,

Fig. 5 shows a flow chart continued from Fig. 4,

Fig. 6 illustrates a display state,

Fig. 7, comprising Figs. 7A and 7B, shows a flow chart of an operation at camera release,

Fig. 8 shows a flow chart continued from Fig. 7, and

Fig. 9 shows a flow chart of an external program.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 2 shows a first embodiment, in which numeral 1 denotes an optical system for focusing an optical image of an object to be picked up, numeral 2 denotes a diaphragm/shutter for attaining proper exposure, numeral 3 denotes a CCD for converting the focused optical image to an electrical signal, numeral 4 denotes a pre-processing circuit for correcting and amplifying an output from the CCD, numeral 5 denotes an AD converter for converting a video signal to a digital signal, numeral 6 denotes a writable electric memory, numeral 7 denotes a read-only memory, numeral 8 denotes a recording medium for recording the video signal thereon, numeral 9 denotes a direct memory access (DMA) controller for transferring the digital data, numeral 10 denotes a CPU for controlling the system and for processing the image data, numeral 11 denotes a writable non-volatile memory, numeral 12 denotes an external connector for exchanging information with external, numeral 13 denotes a display for displaying an operation state of the camera to a user, and numeral 14 denotes a console unit for entering an instruction from the user.

When the camera of the present invention is used, the user first sets the operation thereof.

In setting, the external connector 12 is connected with a personal computer through a cable (hereinafter referred to as PC) and the setting is made by using a setting program on the PC.

Fig. 3 shows a flow chart of the setting program

on the PC.

By using this program, the operation mode of the camera of the present invention is sequentially set starting from a mode 1 (S1).

Whether a result of the process in that mode (S5) is a main file (image file) or an attribute file is set (S6).

Whether a program for carrying out the operation mode is built in the camera or an external program is set (S7), and if it is built in (S7'), whether it is a natural image record or a bar code record is set (S8), and if it is the bar code record, a type of the bar code such as JAN code, Code 39 or NW-7 is determined (S9). Whether the natural image is also to be recorded or not is set (S10), if it is the natural image record in S8, the number of recording bits per pixel is set (S11). The number of recording pixels (S12), a gamma compression characteristic, whether it is a color image or a monochromatic image, if it is the color image, color spaces for recording ($Y:C_1:C_2 = 4:2:2$ or $4:1:1$ or RGB) are set (S15). Then, in S16, whether it is to be compressed or not is set, and when it is to be compressed, a compression factor is set in S17 and the process returns (S18).

In S7, if it is the external program, a file name of the external program is set (S19) as shown in Fig. 5, and if the external program requires a setting option, the option of the external program is set (S20). Then, in S21, the setting option of the external program is recorded on the recording medium and the process returns at S22.

After the settings of the routine of the operation mode 1 have been done, the settings for the operation modes 2, 3, ... are done (S2, S3).

After the setting of the operation modes 1, 2, 3, ... have been done, the setting program on the PC communicates with the camera of the present invention through the cable to write the setting information in the EEPROM in the camera. Then, the operation is terminated.

Then, the user manipulates console buttons of the camera of the present invention to instruct the operation mode of the camera.

Fig. 6 shows manipulation buttons and an LCD display panel of the camera. Figs. 7A, 7B and 8 show flow charts of a camera release operation.

Each time the user depresses a mode button, segments "1", "2", "3" and "4" indicating operation modes are sequentially turned on the LCD panel. The user depresses the mode button until a desired operation mode number is turned on to select the operation mode.

When the user depresses the release button (S401) after he/she has set the operation mode, the camera reads out the setting information of the operation mode previously set in the EEPROM (S402) and proceeds the process in accordance with the setting information.

If it is the built-in mode in S403 and the natural

image record in S404, built-in program in the ROM will be executed and the signal read from the CCD is processed in accordance with the subsequent setting contents (the number of record pixels, the number of record bits, the compression or non-compression and the compression factor) (S405 - S414).

In S405, the exposure is made to the CCD, and in S406, the image signal is read out of the CCD and it is transferred to the RAM. Then, in S407, a brilliance signal is generated, and in S408, whether it is a color image or a monochromatic image is determined, and if it is the color image, a chrominance signal is generated and the process proceeds to S310. If it is the monochromatic image in S408, the process directly proceeds to S410. In S410, resampling is made by the preset number of record pixels, and in S411, color conversion to the preset color space is made in S412, the signal is compressed to the preset bit length. If the presence of the compression is determined in S413, the compression is made in S414 and the process proceeds to S415. If the absence of the compression is determined in S413, the process directly proceeds to S415.

If it is the bar code record mode in S404, the signal read from the CCD is processed for the bar code recognition (S419 - S422) according to built-in program code on the ROM.

In S419, the exposure is made to the CCD, and in S420, the image signal is read from the CCD and it is transferred to the RAM. In S421, the bar code recognition is made and in S422, whether the bar code is to be recorded as the video information or not is determined. If YES, the process proceeds to S407. If NO, the process directly proceeds to S415.

Various methods for recording the natural image and recognizing the bar code have been proposed and known, and they are not discussed in detail herein.

If it is the external mode in S403, a file name of the external program is read from the EEPROM (S423) and the program of that file name is read from the recording medium and transferred to the DRAM (S424), and an entry address of the program is sub-routine called (S425) to shift the control to the program.

A setting file of the external program to be executed is further read from the recording medium as required. When the execution of the external program is completed, the return command of the sub-routine is executed to return the control to the camera.

Finally, when it is determined that it is the main file (S415), the camera records the information processed by the image pick-up on the recording medium as it is, and writes the file name in the EEPROM (S416, S417 and S426).

In S416, the file number or file name is automatically generated, and in S414, the image data is written into the file. In S426, the file number or file name

is written into the EEPROM.

If it is set as the attribute file, it is recorded in the attribute area of the main file recorded in S426 (S418).

Fig. 9 shows a flow chart of the external program.

It is a character recognition program.

First, a preset setting file is read from the recording medium (S501). The setting file includes the information preset by the setting program on the PC. Setting information of a language to be character-recognized is acquired (S502) and a file of font used in that language is read from the recording medium (S503).

Then, the exposure is made and the image signal is transferred from the CCD to the RAM (S504) and the characters are extracted and pattern-matched (S505) and the characters are recognized and converted to the ASCII code, for example.

The file name of the file recorded immediately before is read from the EEPROM (which was written in S426) and the recognized character code is additionally recorded in the attribute area of the file.

In accordance with the present embodiment, the retrieval and management of the image file after the image pick-up are facilitated.

Claims

1. An electronic camera comprising:
 - image signal processing means for selectively processing an image signal in one of photographing modes and one of signal processing modes; and
 - means for recording a processed image signal in a main file area or an attribute file area according to a selective process by said image signal processing means.
2. An electronic camera according to Claim 1 further comprising:
 - means for transferring data or program from an image pick-up unit to a RAM or between a recording medium and the RAM;
 - means for recording whether a program for controlling and processing the mode is a built-in program or an external program,
 - wherein in the image pick-up in the mode with the external program being designated, the program is transferred from the recording medium to the RAM and then the control is shifted to the program.
3. An image pick-up apparatus comprising:
 - a) image pick-up means, and
 - b) signal processing means for selectively switching between a first mode for storing an output of said image pick-up means as image information and a second mode for storing the
- output as coded pattern information.
4. An image pick-up apparatus according to claim 3 wherein said signal processing means includes pattern recognition means for recognizing a pattern in said second mode.
5. An image pick-up apparatus according to claim 3 further comprising communication means for communicating with a peripheral device externally of the image pick-up apparatus.
6. An image pick-up apparatus according to Claim 5 wherein said signal processing means is controlled by said external peripheral device through said communication means.
7. An image pick-up apparatus comprising:
 - a) image pick-up means,
 - b) signal processing means for processing an output of said image pick-up means selectively in one of a plurality of different manners,
 - c) input means for inputting a control signal externally of the image pick-up apparatus, and
 - d) control means for selecting the manner of signal processing in said signal processing means in accordance with the control signal inputted through said input means.
8. An image pick-up apparatus according to Claim 7 wherein said signal processing means includes a first mode for outputting the output of said image pick-up means as an image signal and a second mode for encoding the output to a pattern signal.
9. Image pick device including a memory programmable from an external source to control processing modes used to process an input image signal.

FIG. 1

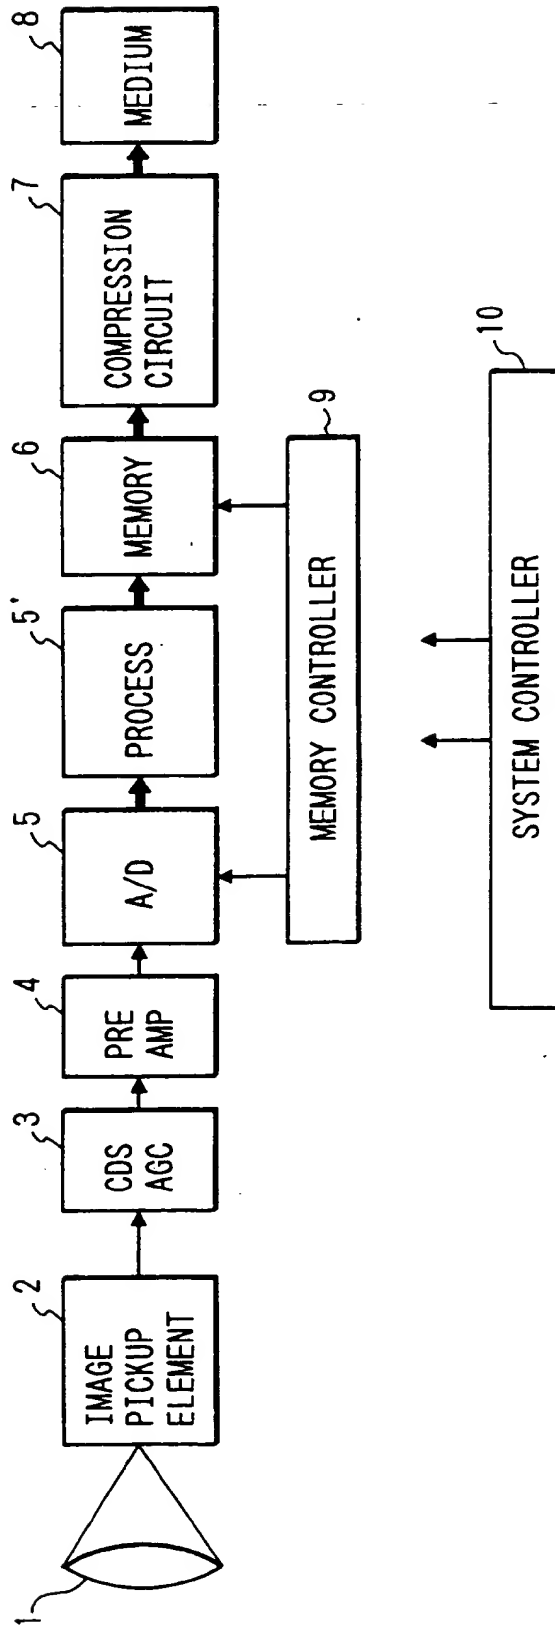


FIG. 2

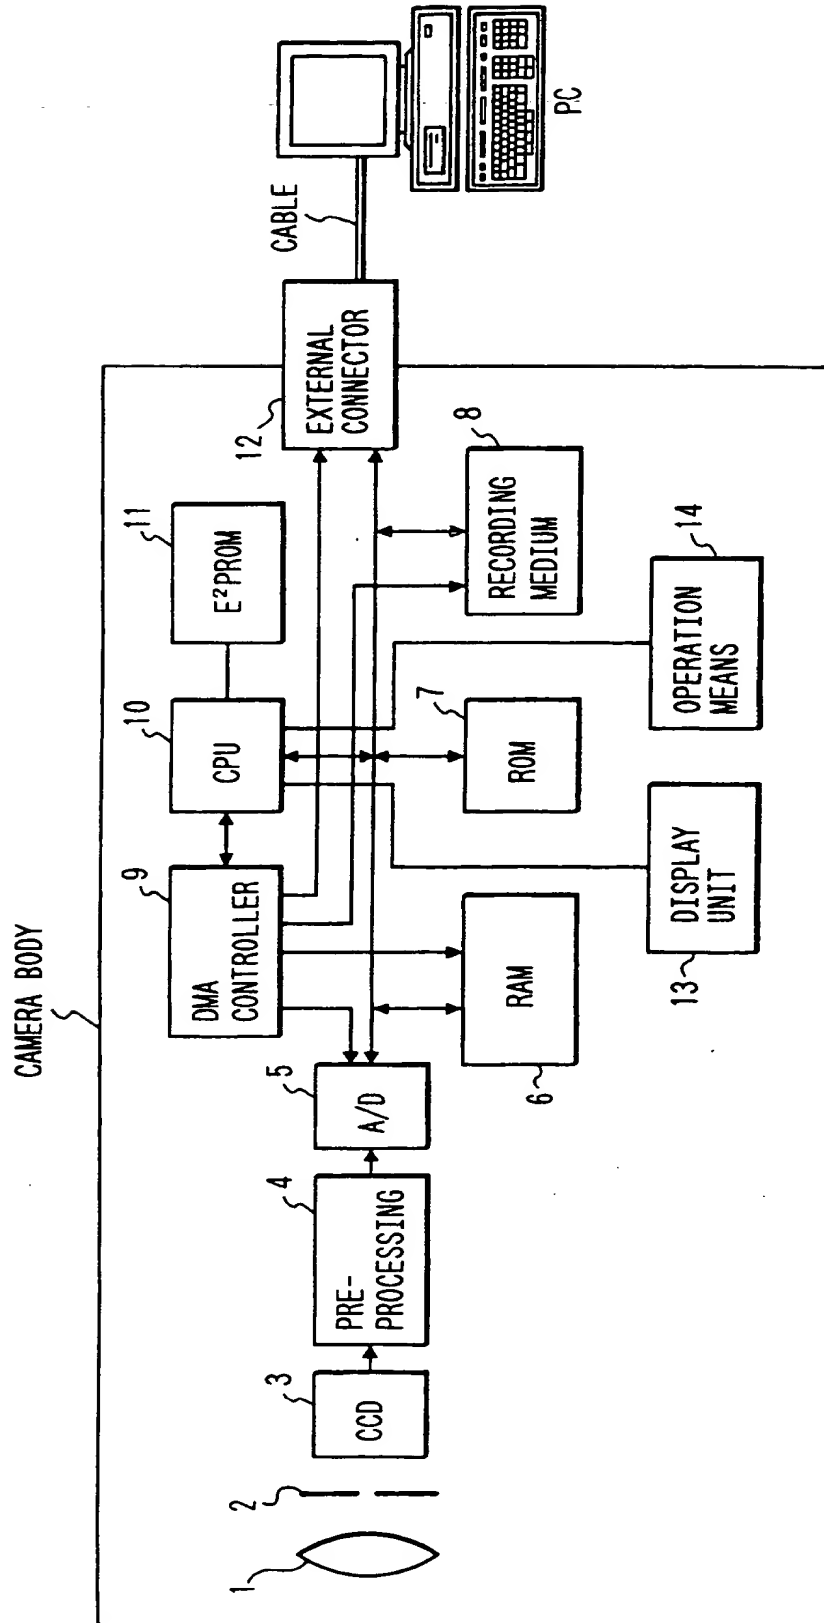


FIG. 3

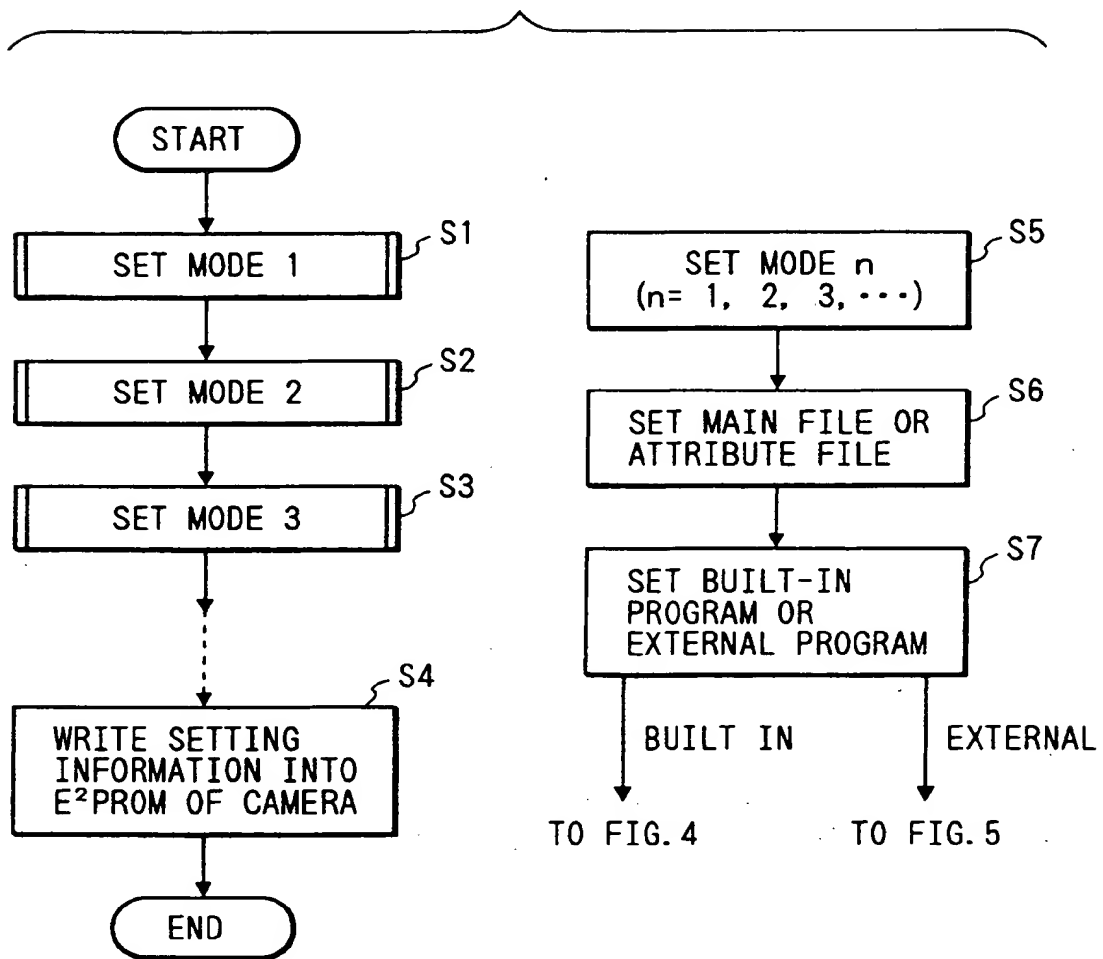


FIG. 4

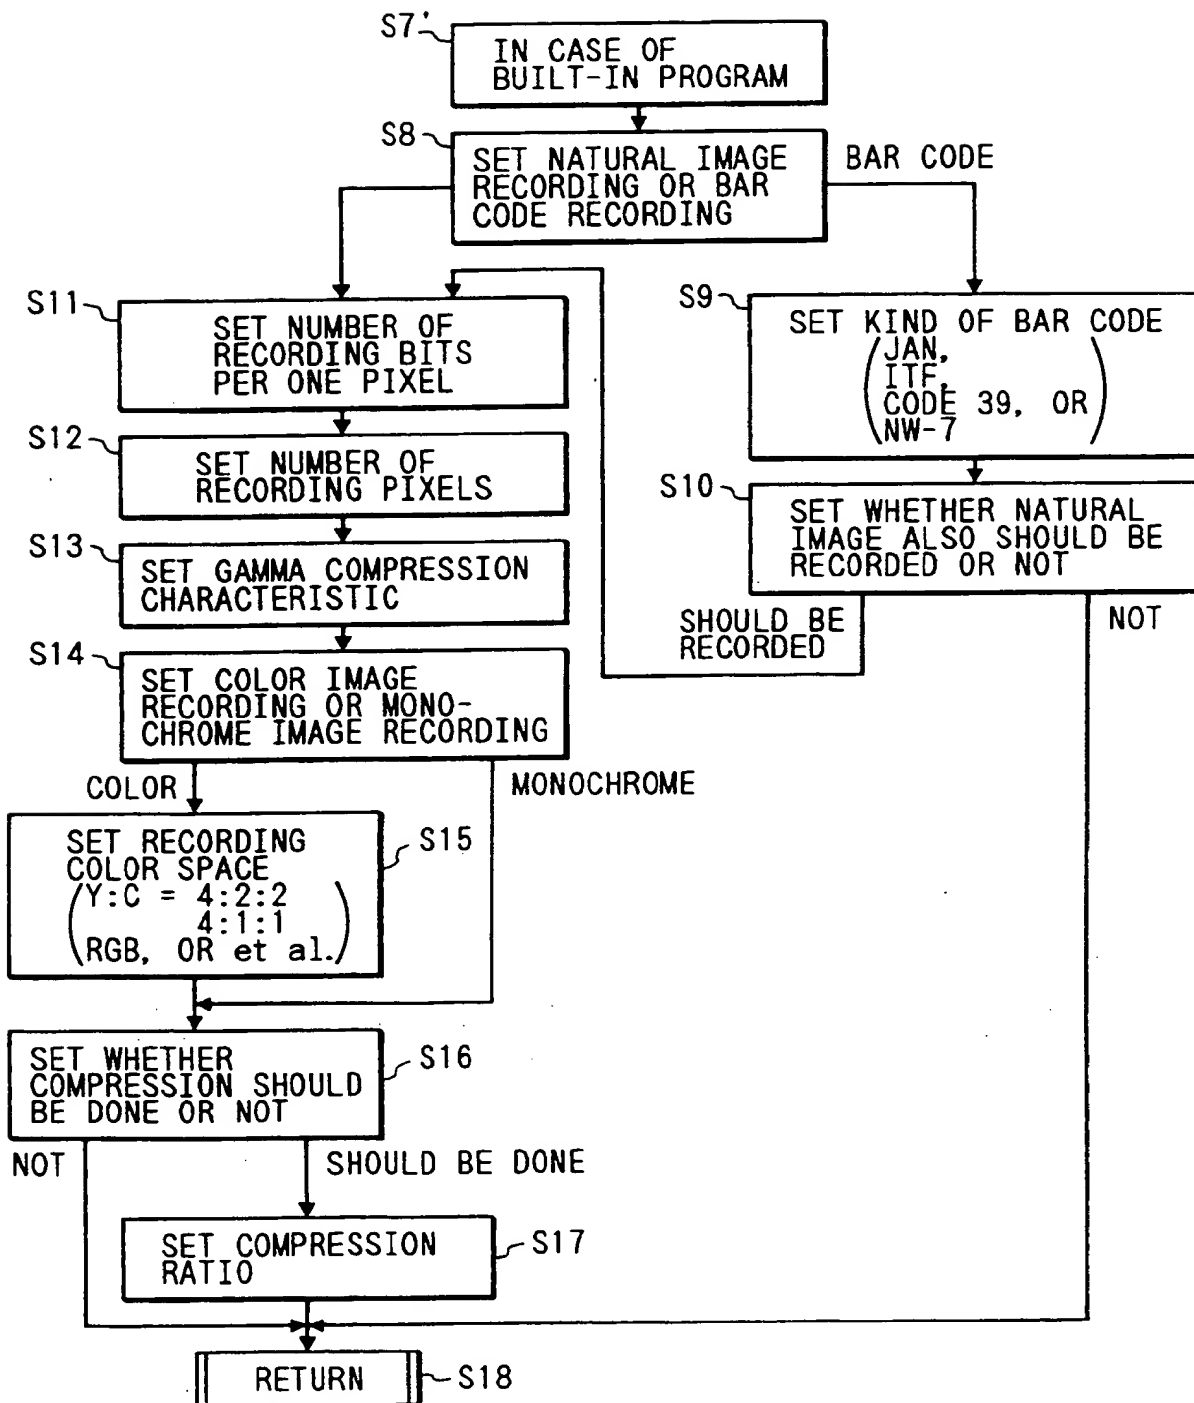


FIG. 5

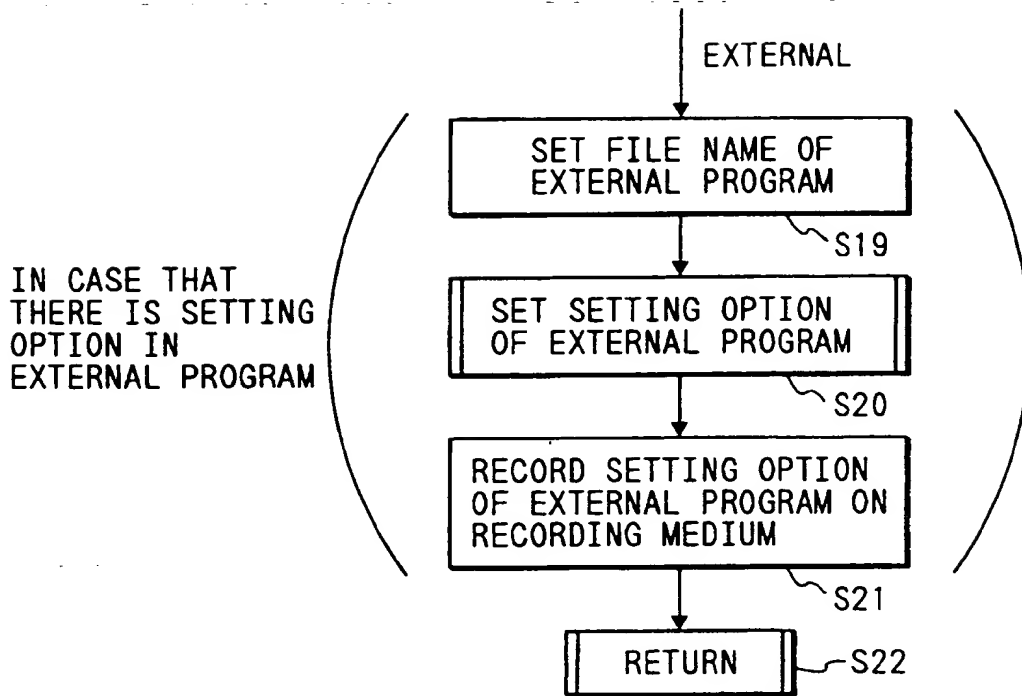


FIG. 6

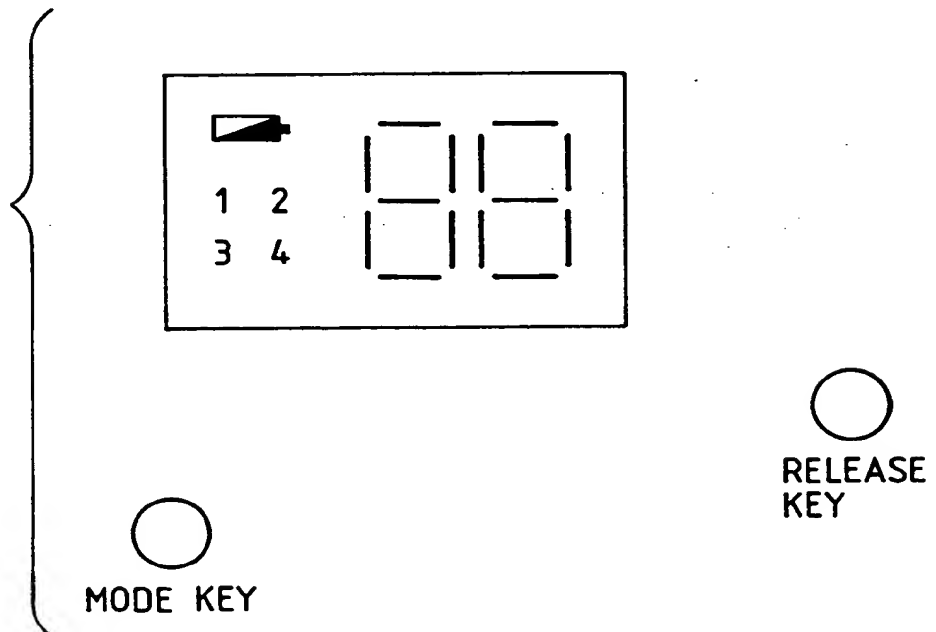


FIG. 7

FIG. 7A

FIG. 7B

FIG. 7A

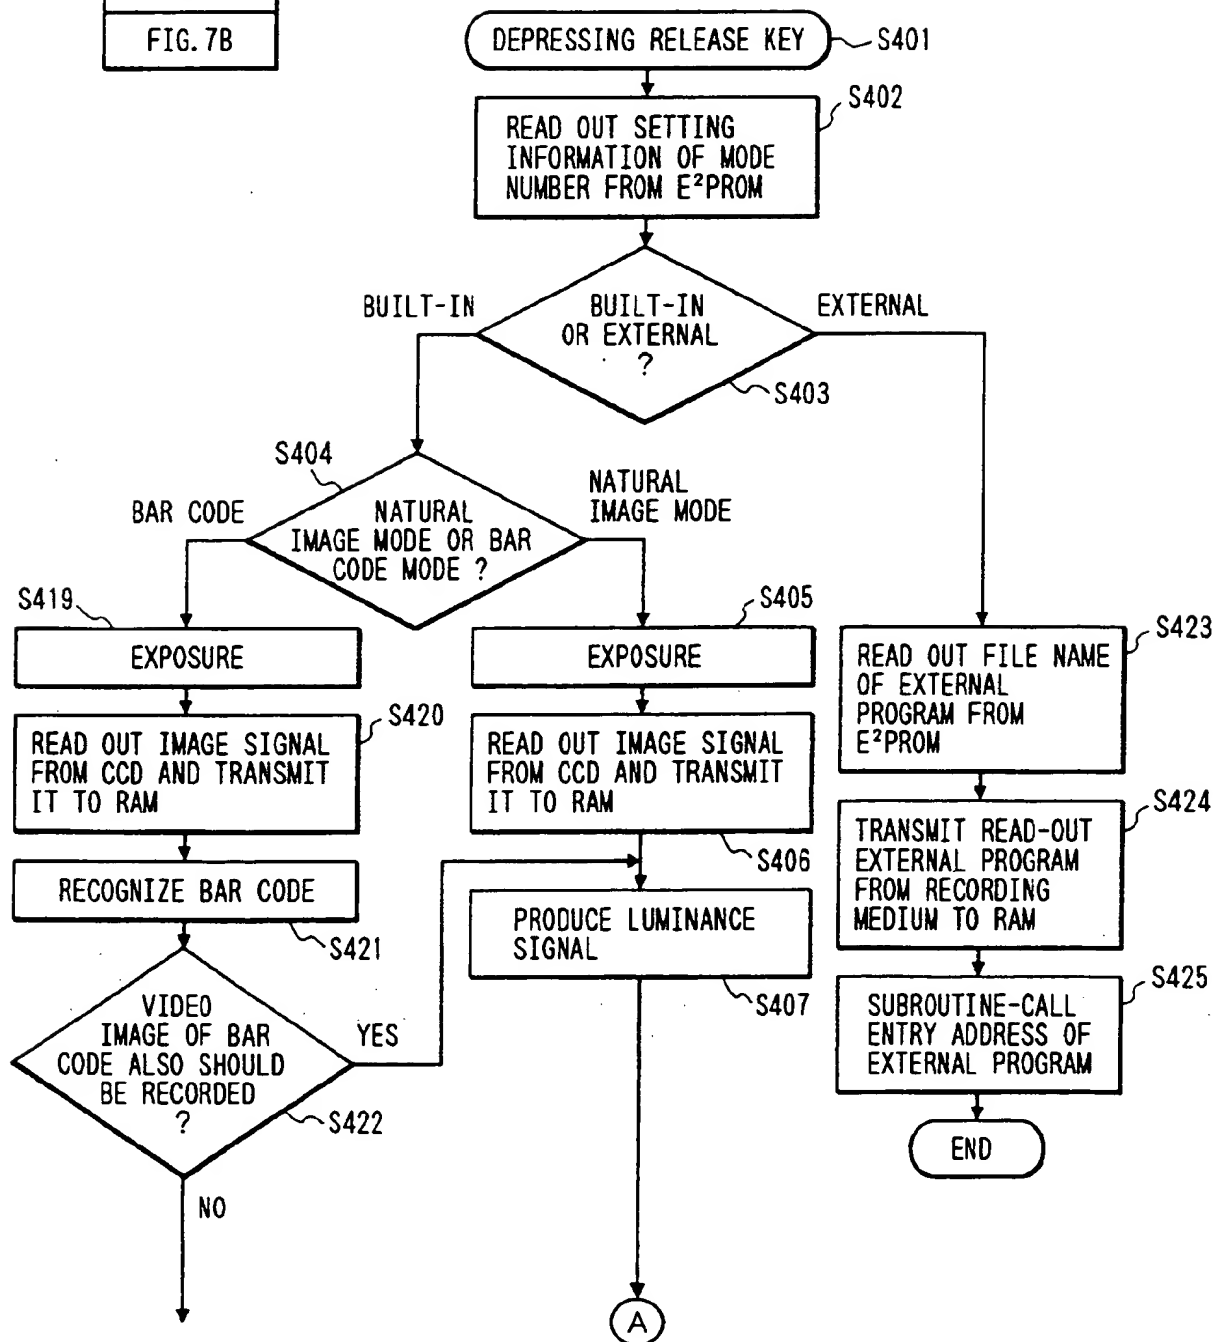


FIG. 7B

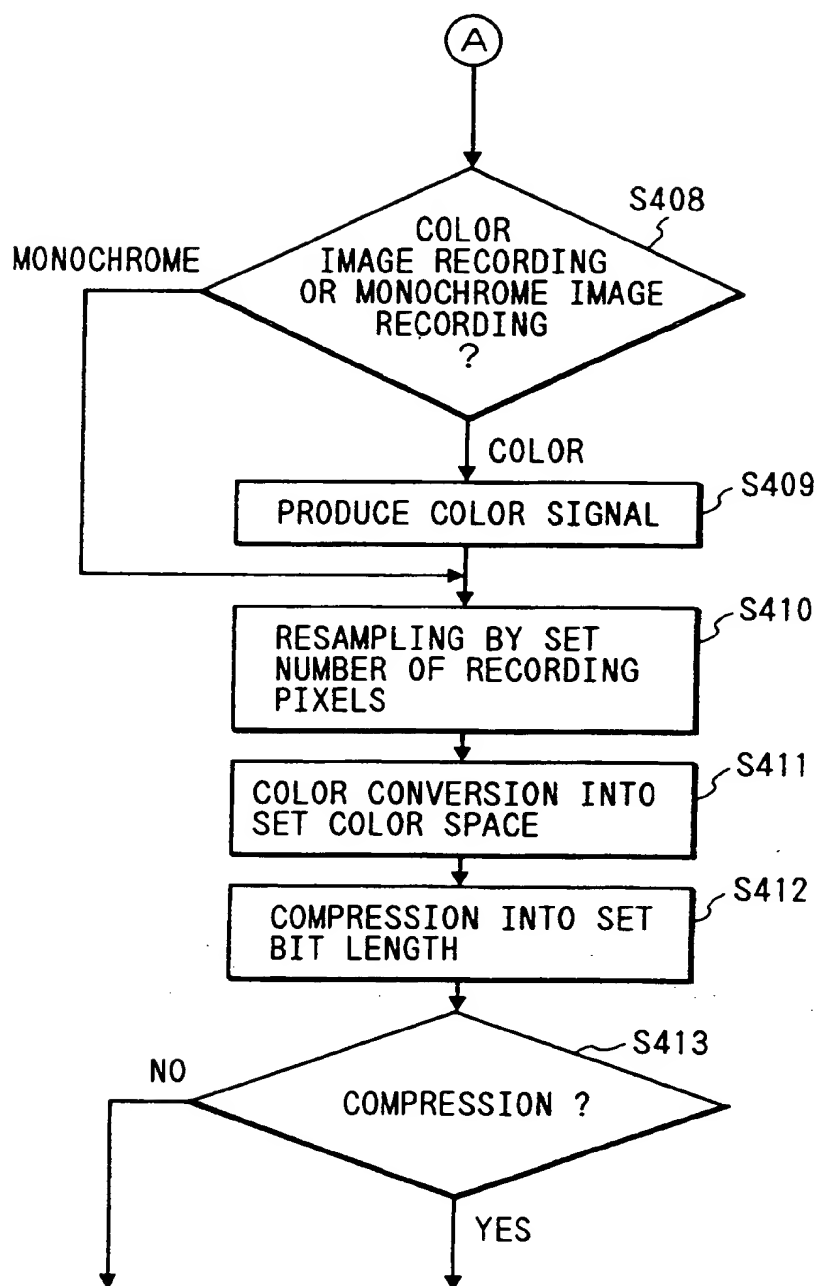


FIG. 8


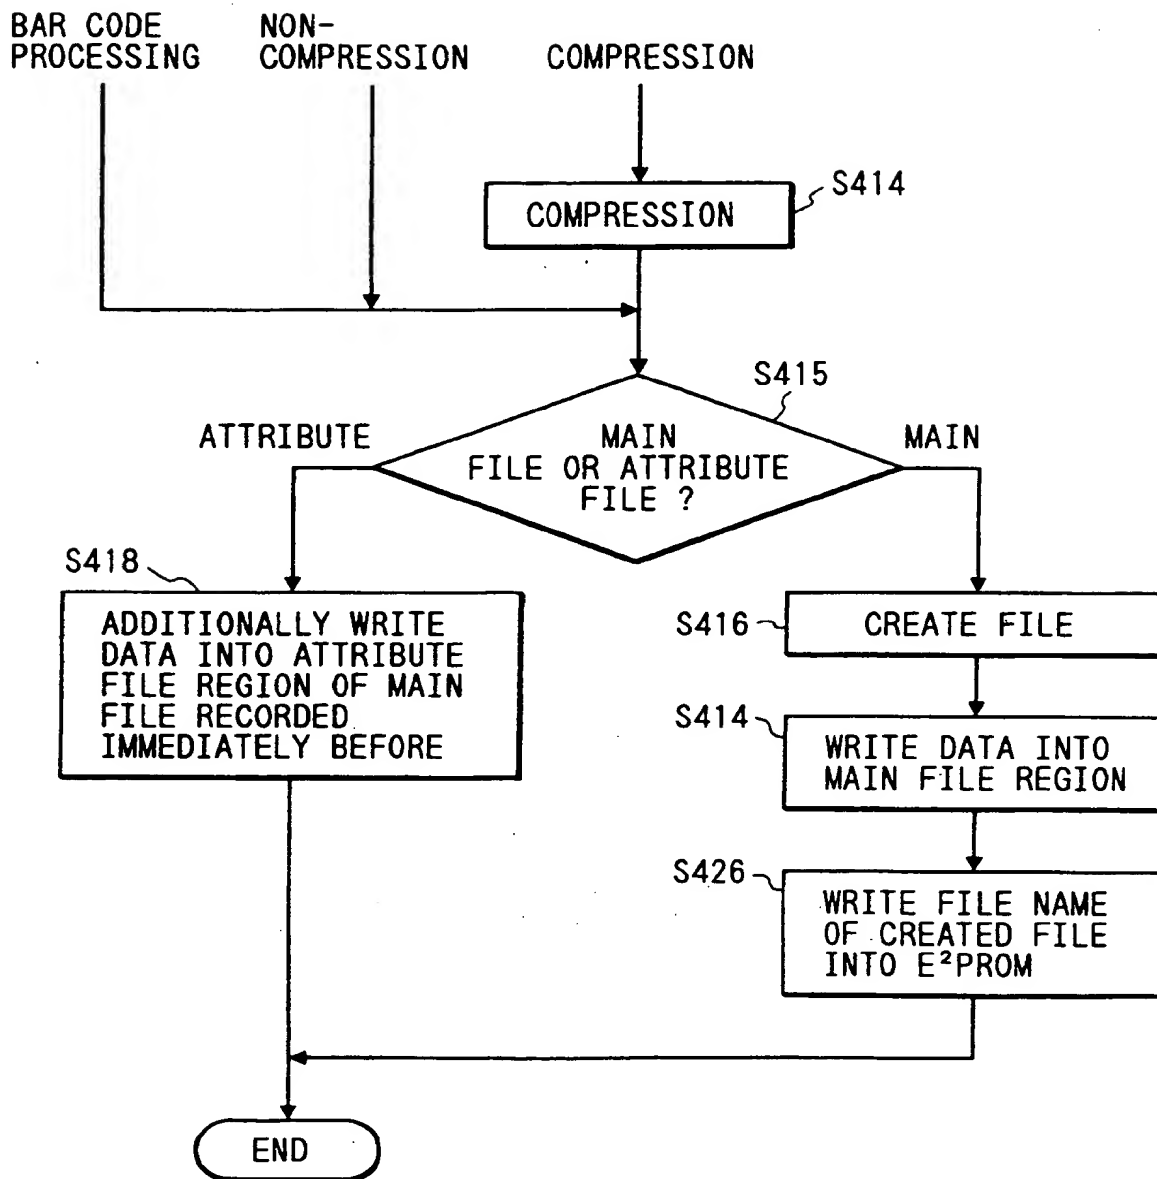


FIG. 9



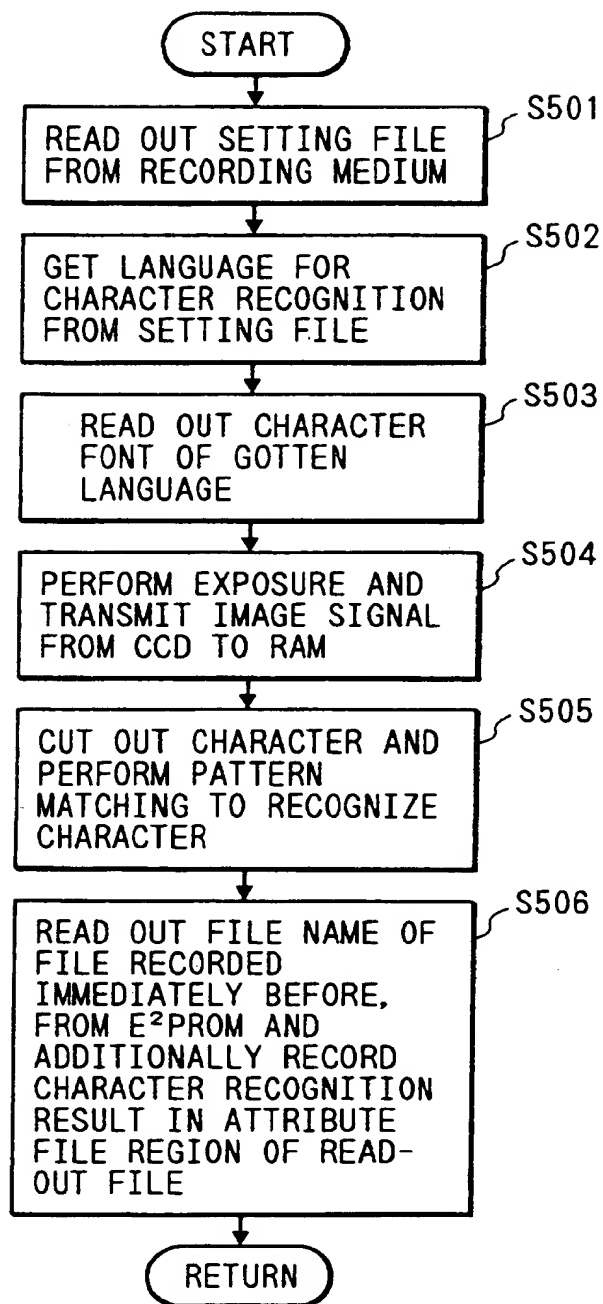

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 94 30 7949

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
Y	US-A-5 039 847 (MORII ET AL.)	1,3	H04N1/21 G06K7/10
A	* the whole document *	4,8	
Y	--- PATENT ABSTRACTS OF JAPAN vol. 16, no. 204 (E-1202) 15 May 1992 & JP-A-04 032 375 (KYOCERA CORP) 4 February 1992 * abstract *	1	
Y	--- EP-A-0 323 194 (KABUSHIKI KAISHA TOSHIBA) * column 7, line 29 - column 9, line 30 *	3,7	
Y	--- PATENT ABSTRACTS OF JAPAN vol. 17, no. 665 (E-1472) 8 December 1993 & JP-A-05 219 430 (FUJI PHOTO FILM CO., LTD.) 27 August 1993 * abstract *	7	
A	--- US-A-5 237 156 (KONISHI ET AL.) * the whole document *	1,3,4,7, 8	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	--- US-A-4 500 776 (LASER) -----		H04N G06K
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 24 January 1995	Examiner Hazel, J
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (3.82) (P4/C01)